


LANYARDS Ropes & Accessories

Adjustable Safety Lanyards

Made from white three-strand twisted Polyester rope or double braided Polyester with hand-spliced eyes. Shrink tubing forms a tapered cover over the tails. The forged alloy steel, double-locking safety snap hook is tested and rated at 5,000 lbs. break strength.

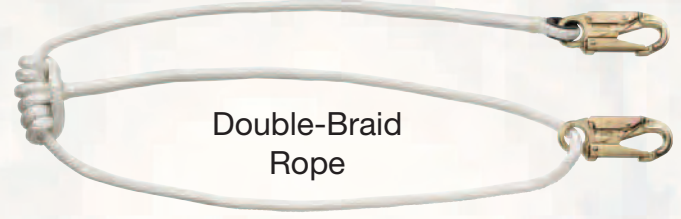


| US PART # | DESCRIPTION | ADJUSTABLE | ROPE DIA. |
|-------------|---|------------|-----------|
| LYT-160-7A | 3-Strand Rope with Double Locking Safety Snap Hook at each end. | 4-7 feet | 1/2" |
| LYT-200-7A | 3-Strand Rope with Double Locking Safety Snap Hook at each end. | 4-7 feet | 5/8" |
| LYT-200-10A | 3-Strand Rope with Double Locking Safety Snap Hook at each end. | 7-10 feet | 5/8" |
| LYB-160-7A | Double-Braid Rope with Double Locking Safety Snap Hook at each end. | 4-7 feet | 1/2" |
| LYB-200-7A | Double-Braid Rope with Double Locking Safety Snap Hook at each end. | 4-7 feet | 5/8" |
| LYB-200-10A | Double-Braid Rope with Double Locking Safety Snap Hook at each end. | 7-10 feet | 5/8" |

Two-in-One Lanyard

Two-in-one rope safety lanyard made of 1/2" three-strand Polyester, with double-locking safety snap hooks; includes Prusik runner. The forged steel safety snap hooks are rated at 5,000 lbs. tensile and 100% proof-load tested.

Part Number: LYT-16P-10S

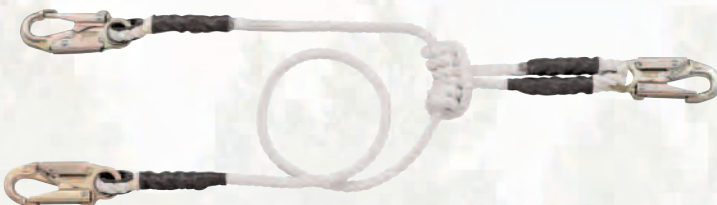

Standard Length: 10 Ft. plus 20" Prusik Runner. Prusik Runners are also sold separately in 3-strand or double-braid rope.

Beranek Lanyard

Hand-spliced 5/8" double-braid with a double-locking safety snap hook. The bitter end is back-spliced.

Standard Lengths: 8 ft. and 10 ft.

